

Airtight shutoff damper with actuator mounting



DESCRIPTION

Galvanised round shutoff damper with actuator mounting. The damper blade has rubber gaskets allowing it to shut the ductwork airtight. The casing airtightness meets class C according EN1751, damper blade air leakage meets class 4 according EN1751. Both flange connections are fitted with EPDM gaskets.

Airtight blade: Class 4 EN1751
 Airtight casing: Class C EN1751
 Galvanised steel sheet


PRODUCT KEY

KRS00M - 200

type _____
 Ød₁ _____

KRS00M — airtight shutoff damper with actuator mounting and gaskets at flanged ends

DIMENSIONS

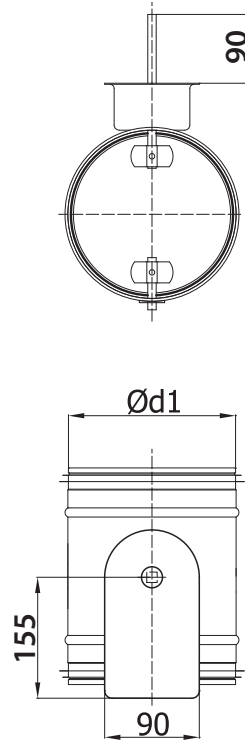

Ød _{1 nom} (mm)	Weight (kg)
100	0.7
125	0.8
160	0.9
200	1.2
250	1.5
315	1.8
355	2.3
400	2.8
450	3.8
500	4.5
560	5.2
630	6.0